


**Please note: The piston distributors comprising Groups 340, 350 and 390 are only supplied complete with metering nipples. Possible tubing connection: M8x1 ports tapped for solderless ø4 tube connection.**

**See brochure 1-5015-US for piston distributors with quick connector system.**

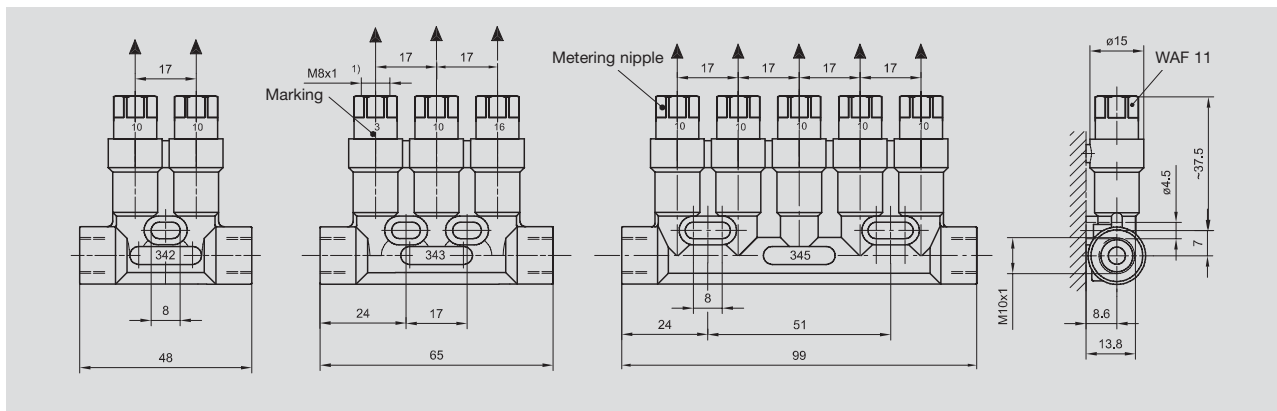

**Piston distributors**  
(available only with metering nipples installed)

Order No.	Number of lube points
<b>342-4...-000</b>	<b>2</b>
<b>343-4...-.00</b>	<b>3</b>
<b>345-4...-. . .</b>	<b>5</b>

**Metering nipple with O-ring, exchangeable**

Rated metered quantity [ccm]	Order key	Marking on the metering nipple	Order No.
<b>0.01</b>	<b>1</b>	1	Metering nipple not exchangeable
<b>0.02</b>	<b>6</b>	2	Metering nipple not exchangeable
<b>0.03</b>	<b>2</b>	3	<b>995-994-103</b>
<b>0.06</b>	<b>3</b>	6	<b>995-994-106</b>
<b>0.10</b>	<b>4</b>	10	<b>995-994-110</b>
<b>0.16</b>	<b>5</b>	16	<b>995-994-116</b>

**To order:** the order No. has 9 places

To complete the order No. supplement it with the **order key** in keeping with the desired metered quantities

**Order example:** piston distributor, 5-port type, 345-4...-. . .

metered with (from left to right) 0.03 – 0.10 – 0.10 – 0.16 – 0.06 ccm

**Order key:** 2 4 4 5 3

**Order No.:** 345-424-453

Group **340-...** distributors are intended for **direct connection** to a main line with a diameter of 6 mm (double tapered ring and socket union).

1) Ports tapped for solderless tube connection.